

SONYJP-127

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

**09/856233**INTERNATIONAL APPLICATION NO.  
PCT/JP00/06467INTERNATIONAL FILING DATES  
21 September 2000PRIORITY DATE CLAIMED  
22 September 1999TITLE OF INVENTION INFORMATION PROCESSING APPARATUS, DISPLAY CONTROL METHOD, AND  
RECORDING MEDIUMAPPLICANT(S)  
FOR DO/EO/US Jun HIRAI

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to promptly begin national examination procedures (35 U.S.C. 371 (f)).
4. ☐ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c)(2))
  - a. ☐ is attached hereto (required only if not transmitted by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371 (c)(2)). **(Including PCT Request)**
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)). (Unexecuted)
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

**Items 11. to 16. below concern document(s) or information included:**

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98. w/PTO-1449, 3 references
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 & 3.31 is included.
13. ☐ A **FIRST** preliminary amendment.  
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:

Nine (9) Sheets of Formal Drawings and page 10 which is description of reference numbers  
Copy of International Search Report (in English & Japanese)**EXPRESS MAIL LABEL NO. EL804524138US****DATE: May 18, 2001**

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

09/856233

INTERNATIONAL APPLICATION NO.

PCT/JP00/06467

ATTORNEY'S DOCKET NUMBER

SONYJP-127

17. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):**

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... \$1,000.00
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO .... \$860.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$710.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$690.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$100.00

**CALCULATIONS PTO USE ONLY****ENTER APPROPRIATE BASIC FEE AMOUNT =**

\$860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than  
☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	10 - 20 =		x \$18.00		
Independent claims	5 - 3 =	2	x \$80.00	\$160.00	
MULTIPLE DEPENDENT CLAIM(s) (if applicable)			+ \$270.00		

**TOTAL OF ABOVE CALCULATIONS =**

\$1,020.00

- ☐ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.

**SUBTOTAL =**

\$1,020.00

Processing fee of \$130.00 for furnishing the English translation later than  
☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)). +

**TOTAL NATIONAL FEE =**

\$1,020.00

Fee for recording the enclosed assignment (37 CFR 1.21 (h)). Assignment must be accompanied by appropriate cover sheet (37 CFR 3.28, 3.31) +  
 (\$40.00 per property).

**TOTAL FEES ENCLOSED =**

\$1,020.00


**Amount to be:  
Refunded****Charged**

- a. ☐ A check in the amount of \_\_\_\_\_ to cover the above fees is enclosed.
- b. ☒ Please charge my Deposit Account No. 12-1095 in the amount of \$1,020.00 to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required or credit any overpayment to my Deposit Account No. 12-1095. A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

**Lerner, David, Littenberg,  
Krumholz & Mentlik, LLP**  
 600 South Avenue West  
 Westfield, NJ 07090  
 Telephone 908 654-5000  
 Facsimile 908 654-7866



ROBERT B. COHEN

Name

32,768

Registration Number

10/PRTS

## DESCRIPTION

INFORMATION PROCESSING APPARATUS, DISPLAY  
CONTROL METHOD, AND RECORDING MEDIUM

## 5 Technical Field

The invention relates to an information processing apparatus, a display control method, and a recording medium. More particularly, the invention relates to an information processing

10 apparatus, a display control method, and a recording medium, in which in case of, for example, mutually connecting a plurality of digital apparatuses by an IEEE1394 serial bus, a mode of a power source of each digital apparatus is displayed. The invention

15 also relates to an information processing apparatus and a power control method, in which a standby electric power is supplied to only a corresponding circuit from a connecting state of the IEEE1394 serial bus.

## 20 Background Art

In recent years, even in an ordinary home, digital apparatuses such as a D-VTR (Digital Video Tape Recorder) for recording digital broadcast and the like are being spread. In association with it,

25 the operation such that the digital broadcast is received and outputted to a television receiver and the digital broadcast is monitored or the operation

such that the digital broadcast is transferred to the D-VTR and recorded as a digital signal as it is can be easily performed.

For example, the IEEE (The Institute of  
5 Electrical and Electronics Engineers) 1394 serial bus having a high degree of freedom of connection and high durability is used for mutual connection of the digital apparatuses.

According to the IEEE1394 serial bus, even  
10 when a power source of the electronic apparatus connected thereto is in a standby mode, the power source of the electronic apparatus can be turned on by sending a command. Each electronic apparatus, therefore, is set to the standby mode and a current  
15 is always supplied to the apparatus.

However, when the power source of the electronic apparatus is OFF (disconnecting state), since no command can be received, the existence of the electronic apparatus cannot be recognized.  
20 Further, there is a problem such that when the number of electronic apparatuses connected to a network increases, it is difficult to distinguish the electronic apparatus in the standby mode including a power-on state from the electronic  
25 apparatus in the disconnecting state.

Therefore, although there is a method of always setting the power sources of all of the

electronic apparatuses connected to the network into the standby mode, an electric power is supplied even to the electronic apparatus whose use frequency is low, so that there is a problem such that a large  
5 electric power (standby electric power) is eventually consumed.

There is also a problem such that since the IEEE1394 serial bus communicates with many apparatuses, in the apparatuses connected to the bus,  
10 it is necessary to make many circuits operative and, since the apparatus operates at a high speed, a large electric power (standby electric power) is consumed even in the standby mode.

#### Disclosure of Invention

15 The invention is made in consideration of such a situation and intends to display a mode of a power source of each electronic apparatus and enable the power source of the electronic apparatus to be easily managed.

20 The invention is made in consideration of such a situation and intends to reduce a standby electric power in accordance with a connecting state of a bus.

An information processing apparatus  
25 according to claim 1 comprises: memory means for storing a plurality of apparatuses connected to a network; and display control means for controlling a

display of a current supply mode, a standby mode, or a current non-supply mode of the plurality of apparatuses stored in the memory means so that those modes can be distinguished.

5           Apparatuses disconnected from the network can be also stored in the memory means.

          Power input instructing means for instructing a power input through the network can be further provided for the apparatus in the standby  
10   mode.

          The IEEE1394 serial bus can be used as a network.

          A display control method according to claim 5 comprises: a storage control step of controlling  
15   storage of a plurality of apparatuses connected to a network; and a display control step of controlling a display of a current supply mode, a standby mode, or a current non-supply mode of the plurality of apparatuses stored by the control in the storage  
20   control step so that those modes can be distinguished.

          A program for a recording medium according to claim 6 comprises: a storage control step of controlling storage of a plurality of apparatuses  
25   connected to a network; and a display control step of controlling a display of a current supply mode, a standby mode, or a current non-supply mode of the

plurality of apparatuses stored by the control in the storage control step so that those modes can be distinguished.

An information processing apparatus  
5 according to claim 7 comprises: detecting means for detecting a connecting state of a bus; and control means for controlling a supply of an electric power so as to supply the electric power to a predetermined circuit among a plurality of circuits  
10 on the basis of a detection result of the detecting means.

The detecting means can detect a bias voltage from a signal line of the bus.

An IEEE1394 serial bus can be used as a bus.  
15 A power control method according to claim 10 comprises: a detecting step of detecting a connecting state of a bus; and a control step of controlling so as to supply the electric power to a circuit among a plurality of circuits on the basis  
20 of a detection result in the detecting step.

In the information processing apparatus according to claim 1, the display control method according to claim 5, and the recording medium according to claim 6, the plurality of apparatuses  
25 connected to the network are stored and the display of the current supply mode, standby mode, or current non-supply mode of the plurality of apparatuses is

controlled so that those modes can be distinguished.  
In the information processing apparatus according to  
claim 7 and the power control method according to  
claim 10, the connecting state of the bus is  
5 detected and the electric power is supplied to the  
predetermined circuit on the basis of the detection  
result.

#### Brief Description of Drawings

Fig. 1 is a block diagram showing a  
10 construction of a network system to which the  
invention is applied; Fig. 2 is a block diagram  
showing a constructional example of an STB 2 in Fig.  
1; Fig. 3 is a flowchart for explaining a  
specification information collecting process; Fig. 4  
15 is a flowchart for explaining a power managing  
process; Fig. 5 is a diagram for explaining icons  
61-1 to 61-5 which are displayed on an output unit  
52 in Fig. 2; Fig. 6 is a diagram for explaining bar  
graphs; Fig. 7 is a diagram for explaining the icons  
20 61-1 to 61-5 which are displayed on the output unit  
52 in Fig. 2; Fig. 8 is a block diagram showing a  
constructional example of an electronic apparatus to  
which the invention is applied; Fig. 9 is a  
flowchart for explaining processes for supplying an  
25 electric power to each circuit in the electronic  
apparatus in Fig. 8; and Fig. 10 is a diagram for  
explaining a supply of an electric power to each



circuit corresponding to a connecting state of a bus.  
Best Mode for Carrying Out the Invention

Fig. 1 shows a constructional example of a network system to which the invention is applied. A television receiver 1 is connected to an STB (Set Top Box) 2 through an IEEE1394 serial bus 11. The STB 2 is connected to a D-VHS (Digital Video Home System) (trademark) 4 as a digital video tape recorder through the IEEE1394 serial bus 11. The STB 2 demodulates a signal of a predetermined channel from a reception signal of a satellite broadcast wave received by a parabolic antenna 3.

A digital video camera 5 is connected to the television receiver 1 through the IEEE1394 serial bus 11. A VHS 6 as an analog video tape recorder is also connected to the TV receiver 1 through an analog cord 12.

The STB 2 is constructed as shown in, for example, Fig. 2. A tuner 21 receives a signal of a predetermined transmission channel (transmission channel including a broadcast channel instructed from a control unit 29) from the reception signal of the broadcast wave received by the parabolic antenna 3 on the basis of a command from the control unit 29 and outputs it to a demultiplexer 22.

The demultiplexer 22 extracts the signal of a predetermined broadcast channel from the inputted

signal of the transmission channel on the basis of a  
command from a control unit 29, outputs a video  
signal in the extracted signal to a video decoder 23,  
and outputs an audio signal to an audio decoder 24,  
5 respectively. The demultiplexer 22 also extracts a  
signal of a desired broadcast channel to be recorded  
and supplies it to an IEEE1394 interface (I/F) 28.

If the supplied video signal has been  
compressed by an MPEG (Moving Picture Experts Group)  
10 format or the like, the video decoder 23  
decompresses it, corrects a delay time between an  
audio sound and a video image due to the compression  
and decompression, and outputs the video signal to a  
CRT (Cathode Ray Tube) 53. If the supplied audio  
15 signal has been compressed, the audio decoder 24  
decompresses it and outputs it as an analog audio  
signal to a speaker 54. The CRT 53 displays a video  
image corresponding to the input video signal. The  
speaker 54 reproduces the input audio sound.

20 The IEEE1394 interface 28 outputs the  
signal supplied from the demultiplexer 22 to the  
IEEE1394 serial bus 11 and supplies the signal from  
the IEEE1394 serial bus 11 to the demultiplexer 22.

The control unit 29 controls the tuner 21,  
25 demultiplexer 22, and memory 30 on the basis of a  
command from an input unit 51. The control unit 29  
allows a category of the apparatus, a name of a

manufacturer, a function, a node unique ID, and the like as specification (property) information of each of the digital apparatuses (television receiver 1, D-VHS 4, and digital video camera 5) which is  
5 inputted from the IEEE1394 interface 28 through the IEEE1394 serial bus 11 to be stored into a memory table in the memory 30. The VHS 6 as an analog apparatus cannot be directly connected to the IEEE1394 serial bus 11 as a digital bus. Thus, the  
10 IEEE1394 interface 28 cannot detect the VHS 6. Accordingly, the user operates the input unit 51, so that the property information of the VHS is directly inputted.

The input unit 51 is constructed by, for  
15 example, a remote commander or the like and operated by the user when the user inputs various commands to the control unit 29. An output unit 52 is constructed by, for example, an LCD (Liquid Crystal Display) or the like, selects a predetermined type  
20 from the memory table stored in the memory 30 on the basis of a command from the control unit 29 and displays it. A magnetic disk 41, an optical disk 42, a magnetooptic disk 43, a semiconductor memory 44, or the like can be inserted into a drive 31.

25 The specification information collecting process which is executed every bus reset will now be described with reference to a flowchart of Fig. 3.

In step S1, the control unit 29 selects one of the digital apparatuses connected to the network. In step S2, the control unit 29 inquires the apparatus selected in step S1 of the property  
5 information of the apparatus from the IEEE1394 interface 28 through the IEEE1394 serial bus 11.

In step S3, the control unit 29 discriminates whether a response has been received from the apparatus inquired in step S2 or not. If  
10 it is determined that no response is received, the processing routine is returned to step S1 and the foregoing processes are repeated. If it is decided in step S3 that the response has been received, step S4 follows and the control unit 29 discriminates  
15 whether the received property information has already been recorded in the memory table in the memory 30 or not.

If it is determined in step S4 that the property information is not recorded in the memory  
20 table yet, step S5 follows. The control unit 29 allows the received property information to be stored into the memory table in the memory 30 together with the date. If it is decided in step S4 that the received property information has already  
25 been stored in the memory table, step S6 follows. The control unit 29 updates the date of the registration of the corresponding property

information stored in the memory table in the memory  
30.

After the process in step S5 or S6, the  
control unit 29 discriminates whether all of the  
5 digital apparatuses connected to the network have  
been selected or not in step S7. If it is  
determined that all of the apparatuses are not  
selected yet, the processing routine is returned to  
step S1 and the foregoing processes are repeated.

10 If it is determined in step S7 that all of  
the digital apparatuses connected to the network  
have been selected, step S8 follows. The control  
unit 29 discriminates whether the property  
information whose registration date has expired by  
15 one year or more exists in the property information  
stored in the memory table in the memory 30 or not.  
If it is decided that the property information whose  
registration date has expired by one year or more,  
step S9 follows. The control unit 29 deletes the  
20 property information whose registration date has  
expired by one year or more exists from the property  
information stored in the memory table in the memory  
30. The processing routine is finished. If it is  
decided in step S8 that the property information  
25 whose registration date has expired by one year or  
more does not exist, the process in step S9 is  
skipped. The processing routine is finished.

Although whether the registration date has expired by one year or more or not is discriminated in the above example, the number of days in such a case can be arbitrarily set.

5           The power managing process which is executed every predetermined time will now be described with reference to a flowchart of Fig. 4.

          In step S21, the control unit 29 selects one of the digital apparatuses (property  
10 information) stored in the memory table in the memory 30. In step S22, the control unit 29 inquires the apparatus selected in step S21 of a power supply mode of such an apparatus through the IEEE1394 serial bus 11 from the IEEE1394 interface  
15 28. In step S23, the control unit 29 discriminates whether a response has been received from the apparatus inquired in step S22 or not, that is, whether the connecting state is in the disconnection mode (since the apparatus whose power source is OFF  
20 can neither receive an inquiry nor return the response, when no response is returned, it is determined that the apparatus is in the disconnection mode) or not. If it is decided that no response is received, step S24 follows. The  
25 control unit 29 selects the tape of apparatus from the property information stored in the memory table in the memory 30 and allows the icon corresponding

to the apparatus whose mode has been determined as a disconnection mode to be inversion-displayed on the output unit 52. For example, as shown in Fig. 5, if the apparatus is the digital video camera 5, an icon  
5 61-4 corresponding thereto is inversion-displayed.

If it is decided in step S23 that the response has been received, step S25 follows. The control unit 29 discriminates whether the power supply mode of the received response is a power-on  
10 mode or not. If it is decided that the power supply mode is the power-on mode, step S26 follows. The control unit 29 selects the type of such an apparatus from the property information stored in the memory table in the memory 30 and allows the  
15 icon corresponding to such an apparatus which has been determined to be the power supply mode to be normally displayed on the output unit 52. For example, as shown in Fig. 5, if the apparatus is the television receiver 1, the icon 61-1 corresponding  
20 to it is normally displayed.

If it is determined in step S25 that the power supply mode of the response is not the power-on mode, step S27 follows. Since the power supply mode of the response is the connection standby mode  
25 (standby mode in which although a main power switch is ON, a sub power switch is OFF), the control unit 29 selects the type of such an apparatus from the

property information stored in the memory table in the memory 30 and allows the icon corresponding to the apparatus whose power supply mode has been determined to be the connection standby mode to be mesh-displayed on the output unit 52. For example, if the apparatus is the D-VHS 4 as shown in Fig. 5, the icon 61-3 corresponding to such an apparatus is mesh-displayed.

After the processes in steps S24, S26, and S27, the control unit 29 discriminates whether all of the digital apparatuses stored in the memory table in the memory 30 have been selected or not in step S28. If it is determined that all of the digital apparatuses are not selected yet, the processing routine is returned to step S21 and the foregoing subsequent processes are repeated. If it is determined in step S28 that all of the digital apparatuses have been selected, the processing routine advances to step S29 and the control unit 29 discriminates whether a predetermined time has elapsed or not. If it is decided that the predetermined time does not elapse, the apparatus waits until it is determined that the predetermined time has elapsed in step S29. The predetermined time can be arbitrarily set. If it is decided that the predetermined time has elapsed, the processing routine is returned to step S21 and the foregoing



processes are repeated. In the example of Fig. 5, further, the self icon 61-2 is normally displayed and the icon 61-5 of the VHS 6 is inversion-displayed.

5                   As mentioned above, since the power supply mode is inquired every predetermined time and the corresponding icon is displayed on the basis of its response, the user can easily confirm the power supply mode of each apparatus from the display state  
10 of the icon.

                  When the icon of the connection standby mode (icon 61-3 in the example of Fig. 5) among the foregoing icons is clicked, a power-on command is transmitted to the apparatus corresponding to the  
15 icon. For example, although the icon 61-3 in Fig. 5 now indicates the connection standby mode, if this icon is clicked by the user, the power-on command is transmitted to the corresponding apparatus (D-VHS 4 in this case). At this time, for a time interval  
20 from the transmission of the power-on command to the switching from the mode of the D-VHS 4 to the power-on mode, the control unit 29 of the STB 2 allows a bar graph 71 to be displayed on the output unit 52 (for example, LCD) as shown in Fig. 6(A), thereby  
25 enabling the user to confirm the fact that the command has been sent. After completion of the transmission of the command, the bar graph 71

becomes as shown in Fig. 6(B). The icon 61-3 is changed to the normal display as shown in Fig. 7.

Since each digital apparatus is inquired the power supply mode through the IEEE1394 serial  
5 bus 11 and the icon corresponding to the power-on mode, connection standby mode, or disconnection mode is displayed as mentioned above, the power source can be easily managed. In case of the connection  
10 standby mode, even if the power switch of the apparatus is not directly turned on, by clicking its icon, the power-on command is transmitted. Therefore, the mode can be easily switched even for an apparatus installed at a remote location.

Although the category of the apparatus in  
15 the property information stored in the memory table has been displayed on the icon in the above example, according to the invention, the other items such as name of manufacturer, function, node unique ID, and the like can be also displayed. Further, although  
20 the icons 61-1 to 61-5 have been normally displayed, mesh-displayed, or inversion-displayed in order to distinguish the modes of the power source, an arbitrary display method can be used so long as three modes of the power source can be distinguished  
25 by, for example, colors or the like.

Software to execute the foregoing series of processes is installed from the recording medium

into a computer in which a program constructing the software has been built in dedicated hardware or, for example, into a general personal computer or the like in which various functions can be executed by  
5 installing various programs.

As shown in Fig. 2, the recording medium is constructed not only by the control unit 29 which is provided for the user in a state where it has previously been built in the STB 2 and in which the  
10 program has been recorded but also by a package media comprising the magnetic disk 41 (including a floppy disk), optical disk 42 (including a CD-ROM (Compact Disk-Read Only Memory), DVD (Digital Versatile Disk)), magneto optic disk 43 (including an  
15 MD (Mini-Disk)), semiconductor memory 44, or the like which is distributed to provide the program to the user separately from the computer and in which the program has been recorded.

In the specification, a step of describing  
20 the program which is recorded into the recording medium includes not only processes which are time-sequentially executed in the disclosed order but also processes which are executed in parallel or individually even if they are not always time-  
25 sequentially executed.

In the specification, the system shows the whole apparatus constructed by a plurality of

apparatuses.

A construction of an electronic apparatus which can reduce a standby electric power in accordance with a connecting state of the bus will  
5 now be described with reference to Fig. 8. Although the foregoing STB 2 will be described as an example as an electronic apparatus 102, an apparatus such as television receiver, D-VHS, digital video camera, or the like can be also used. The electronic apparatus  
10 102 is connected to an external apparatus (for example, personal computer) through an IEEE1394 serial bus 101. A plug (not shown) of the IEEE1394 serial bus 101 is connected to a terminal of a physical connecting circuit 112. Thus, in the  
15 electronic apparatus 102, a supply of digital data transmitted from the external apparatus through the IEEE1394 serial bus 101 is received by the physical connecting circuit 112 and the digital data is transmitted from the physical connecting circuit 112  
20 to the external apparatus through the IEEE1394 serial bus 101.

A connection detecting circuit 111 detects a bias voltage of the IEEE1394 serial bus 101 and outputs a detection signal to a main control circuit  
25 122 of a control circuit 115. The physical connecting circuit 112 is constructed by, for example, an IEEE1394 digital interface or the like,

amplifies the digital data inputted through the IEEE1394 serial bus 101, and outputs it to a logical connecting circuit 113. The physical connecting circuit 112 also amplifies the digital data inputted  
5 from the logical connecting circuit 113 and outputs it to the external apparatus through the IEEE1394 serial bus 101.

The logical connecting circuit 113 depacketizes the digital data which was inputted  
10 from the physical connecting circuit 112 and has been packetized and multiplexed, thereby separating it into a video signal, an audio signal, and a control signal. The circuit 113 outputs the video signal and audio signal to a signal processing  
15 circuit 114 and outputs the control signal to a standby control circuit 121 of the control circuit 115. The logical connecting circuit 113 also executes an addition of an error correction code, a multiplexing process, and the like to the video  
20 signal or audio signal inputted from the signal processing circuit 114 and outputs the resultant signal to the physical connecting circuit 112.

The signal processing circuit 114 supplies the inputted video signal and audio signal to built-  
25 in video decoder and audio decoder (they are not shown), respectively. The video decoder decodes the inputted video data and outputs it to a CRT (Cathode

Ray Tube) (not shown) as necessary. The audio decoder decodes the inputted audio data and outputs it to a speaker (not shown) as necessary. The signal processing circuit 114 also encodes the video  
5 signal and audio signal by the built-in video encoder and audio encoder and outputs them to the logical connecting circuit 113.

The standby control circuit 121 outputs a signal corresponding to the control signal inputted  
10 from the logical connecting circuit 113 to the main control circuit 122. When a power switch (main power source) of the main body is turned on by the user, the standby control circuit 121 supplies its command (control signal) to the main control circuit  
15 122.

The main control circuit 122 is constructed by, for example, a microcomputer or the like and controls a power supplying circuit 117 so as to supply an electric power to a standby power  
20 supplying circuit 116 on the basis of the detection signal inputted from the connection detecting circuit 111. The main control circuit 122 also controls the power supplying circuit 117 so as to supply an electric power to the signal processing  
25 circuit 114 on the basis of a command (command to turn on the main power source) from the user.

The standby power supplying circuit 116

supplies a standby electric power to the physical  
connecting circuit 112, logical connecting circuit  
113, and standby control circuit 121 on the basis of  
a command from the main control circuit 122. When a  
5 power plug (not shown) is connected to a power plug  
terminal of the electronic apparatus 102 and the  
power switch (not shown) is ON, the power supplying  
circuit 117 supplies the standby electric power to  
the connection detecting circuit 111 and main  
10 control circuit 122. The power supplying circuit  
117 also supplies the electric power to the standby  
power supplying circuit 116 or signal processing  
circuit 114 on the basis of a command from the main  
control circuit 122.

15           A specific example of the operation for  
detecting the connecting state of the IEEE1394  
serial bus 101 and supplying the electric power to  
each circuit on the basis of its detection result  
will now be described with reference to a flowchart  
20 of Fig. 9.

          In step S31, the power supplying circuit  
117 sets the mode of the electronic apparatus 102  
into a power-off mode. That is, the power supplying  
circuit 117 does not supply an electric power to all  
25 of the circuits (connection detecting circuit 111,  
physical connecting circuit 112, logical connecting  
circuit 113, signal processing circuit 114, standby

power supplying circuit 116, standby control circuit 121, and main control circuit 122) as shown in Fig. 10(D). In the diagram, o indicates that the electric power is supplied from the power supplying circuit 117 and x denotes that the electric power is not supplied from the power supplying circuit 117. At this time, no electric power is supplied.

In step S32, the power supplying circuit 117 discriminates whether the power plug has been connected to the power plug terminal of the electronic apparatus 102 or not (and whether the main power switch has been turned on or not). If it is determined that the power plug is not connected, the apparatus waits until it is determined that the power plug has been connected in step S32.

If it is determined that the power plug has been connected (and that the main power switch has been turned on) in step S32, in step S33, the power supplying circuit 117 sets the disconnection standby mode and supplies a standby electric power to the connection detecting circuit 111 and main control circuit 122 (Fig. 10(A)). Thus, when the detection signal showing that the IEEE1394 serial bus 101 has been connected is inputted from the connection detecting circuit 111, the main control circuit 122 can shift the mode of the electronic apparatus 102 from the disconnection (state where the IEEE1394



serial bus 1 is not connected) standby mode to the connection standby mode (standby mode in a state where the IEEE1394 serial bus 1 has been connected). In the disconnection standby mode, since the number  
5 of circuits to which the electric power is supplied is smaller than that in the case of the connection standby mode or power-on mode, the electric power consumption can be suppressed by an amount corresponding to it.

10           In step S34, the connection detecting circuit 111 discriminates whether the plug of the IEEE1394 serial bus 101 has been connected to the physical connecting circuit 112 or not, that is, whether a bias voltage has been detected from the  
15 IEEE1394 serial bus 101 or not. If it is determined that the plug of the IEEE1394 serial bus 101 is not connected, the apparatus waits until it is determined that the plug of the IEEE1394 serial bus 101 has been connected.

20           In step S34, if it is determined that the plug of the IEEE1394 serial bus 101 has been connected, the connection detecting circuit 111 outputs the detection signal to the main control circuit 122. At this time, in step S35, the main  
25 control circuit 122 controls the power supplying circuit 117 so as to set the connection standby mode and allows the standby power supplying circuit 116

to supply an electric power. The standby power  
supplying circuit 116 supplies a standby electric  
power to the physical connecting circuit 112,  
logical connecting circuit 113, and standby control  
5 circuit 121 on the basis of a command from the main  
control circuit 122 (Fig. 10(B)).

Thus, for example, when the power-on  
command is sent from the external apparatus through  
the IEEE1394 serial bus 101 or the self sub power  
10 switch is turned on, the electronic apparatus 102  
(main control circuit 122) can be set to the power-  
on mode. Although in the connection standby mode,  
an electric power larger than that in the  
disconnection standby mode is consumed, an electric  
15 power smaller than that in the power-on mode is  
consumed.

In step S36, the main control circuit 122  
discriminates whether the user turns on the sub  
power switch or the command of the power-on mode has  
20 been sent from the external apparatus and the power-  
on mode has been instructed or not. If it is  
determined that the power-on mode is not instructed,  
the processing routine is returned to step S35 and  
the foregoing processes are repeated. If it is  
25 determined in step S36 that the power-on mode has  
been instructed, the main control circuit 122  
controls the power supplying circuit 117 so as to

supply an electric power to the signal processing circuit 114 in step S37 (Fig. 10(C)), thereby shifting the mode of the electronic apparatus 102 (the mode is at present the connection standby mode) to the power-on mode. At this time, although the largest electric power is consumed, the electronic apparatus 102 enters a state where all of the processes can be performed.

In step S38, the power supplying circuit 117 discriminates whether the release of the power-on mode has been instructed from an external apparatus or the self sub power switch has been operated and such a release has been instructed or not. If the release is instructed, the processing routine is returned to step S35 and the mode is shifted to the operation standby mode. Further, the processing routine advances to step S36 and the foregoing subsequent processes are executed. If the release of the power-on mode is not instructed, step S39 follows. The connection detecting circuit 111 discriminates whether the connection of the plug of the IEEE1394 serial bus 101 has been released or not, that is, whether no bias voltage is detected from the IEEE1394 serial bus 101 or not. If it is decided that the connection of the plug of the IEEE1394 serial bus 101 is not released, step S40 follows and the power supplying circuit 117

discriminates whether the connection of the power plug has been released or not. If it is determined that it is not released, the processing routine is returned to step S37 and the foregoing processes are  
5 repeated.

If it is decided in step S39 that the connection of the plug of the IEEE1394 serial bus 101 has been released, the main control circuit 122 returns to step S33 and shifts the mode of the  
10 electronic apparatus 102 (the mode is at present the power-on mode) to the disconnection standby mode. Further, step S34 follows and the foregoing subsequent processes are repeated. If it is decided in step S40 that the connection of the power plug  
15 has been released, the main control circuit 122 returns to step S31 and shifts the mode of the electronic apparatus 102 (the mode is at present the power-on mode) to the power-off mode. Further, step S102 follows and the foregoing subsequent processes  
20 are repeated.

As mentioned above, when the main power switch is turned on, to detect the bias voltage of the IEEE1394 serial bus 101, the standby electric power is supplied to the connection detecting  
25 circuit 111 and main control circuit 122. Thus, when the plug of the IEEE1394 serial bus 101 is connected to the terminal of the physical connecting

circuit 111, the connection detecting circuit 111 detects the bias voltage. The main control circuit 122 receives the input of the detection signal and controls the power supplying circuit 117 so as to  
5 supply an electric power to the standby power supplying circuit 116. The standby power supplying circuit 116 further supplies a standby electric power to the physical connecting circuit 112, logical connecting circuit 113, and standby control  
10 circuit 121. Therefore, the electric power can be supplied only to a predetermined circuit in accordance with the connecting state of the bus.

Although the case of detecting the bias voltage of the IEEE1394 serial bus 101 in order to  
15 detect the connection standby mode of the bus has been described above as an example, the invention can be also constructed in a manner such that a contact to observe the conduction of a shield outside of the plug of the IEEE1394 serial bus 101  
20 is provided on the reception side of the plug and the connection standby mode (the plug has been connected) is physically detected.

Although the case of detecting the connecting state of the IEEE1394 serial bus 101 has  
25 been described above as an example, the invention can be also applied to a case of detecting a connecting state of another bus.

As mentioned above, according to the information processing apparatus according to claim 1, the display control method according to claim 5, and the recording medium according to claim 6, a  
5 plurality of apparatuses connected to the network are stored and the display of the current supply mode, standby mode, or current non-supply mode of the plurality of stored apparatuses is controlled so that those modes can be distinguished. Therefore,  
10 the power source of the electronic apparatus can be easily managed.

According to the information processing apparatus according to claim 7 and the power control method according to claim 10, since the connecting  
15 state of the bus is detected and the electric power is supplied to a predetermined circuit on the basis of the detection result, the waste standby electric power can be reduced.

## CLAIMS

1. An information processing apparatus  
connected to a plurality of apparatuses through a  
network, comprising:
  - 5 memory means for storing said plurality of  
apparatuses connected to said network; and  
display control means for controlling a  
display of a current supply mode, a standby mode, or  
a current non-supply mode of said plurality of  
10 apparatuses stored in said memory means so that said  
modes can be distinguished.
2. An information processing apparatus  
according to claim 1, wherein said memory means also  
stores an apparatus disconnected from said network.
- 15 3. An information processing apparatus  
according to claim 1, further comprising  
power input instructing means for  
instructing an input of a power source to said  
apparatus in the standby mode through said network.
- 20 4. An information processing apparatus  
according to claim 1, wherein said network is an  
IEEE1394 serial bus.
5. A display control method for an information  
processing apparatus connected to a plurality of  
25 apparatuses through a network, comprising:  
a storage control step of controlling a  
storage of said plurality of apparatuses connected

to said network; and

5 a display control step of controlling a display of a current supply mode, a standby mode, or a current non-supply mode of said plurality of apparatuses stored by the control in said storage control step so that said modes can be distinguished.

6. A computer-readable recording medium which records a program for a display control which is used in case of performing the display control of an  
10 information processing apparatus connected to a plurality of apparatuses through a network,

wherein said program comprises:

15 a storage control step of controlling a storage of said plurality of apparatuses connected to said network; and

a display control step of controlling a display of a current supply mode, a standby mode, or a current non-supply mode of said plurality of apparatuses stored by the control in said storage  
20 control step so that said modes can be distinguished.

7. An information processing apparatus connected to a bus, comprising:

detecting means for detecting a connecting state of said bus; and

25 control means for controlling a supply of an electric power so as to supply the electric power to a predetermined one of a plurality of circuits on



the basis of a detection result of said detecting means.

8. An information processing apparatus according to claim 7, wherein

5 said detecting means detects a bias voltage from a signal line of said bus.

9. An information processing apparatus according to claim 7, wherein

said bus is an IEEE1394 serial bus.

10 10. A power control method for an information processing apparatus connected to a bus, comprising:

a detecting step of detecting a connecting state of said bus; and

15 a control step of controlling a supply of an electric power so as to supply the electric power to a predetermined one of a plurality of circuits on the basis of a detection result in said detecting step.

## ABSTRACT

A control unit inquires each digital apparatus stored in a memory table in a memory about a power supply mode of the apparatus through an IEEE1394 serial bus. When a response indicates a power-on mode, corresponding icons 61-1 and 61-2 are normally displayed. When the response indicates a connection standby mode, a corresponding icon 61-3 is mesh-displayed. If there is no response, corresponding icons 61-4 and 61-5 are inversion-displayed. A connection detecting circuit 111 detects a bias voltage of an IEEE1394 serial bus 101 and outputs a detection signal to a main control circuit 122. On the basis of the input detection signal, the main control circuit 122 controls a power supplying circuit 117 so as to supply a standby electric power to a standby power supplying circuit 116. On the basis of a command from the main control circuit 122, the standby power supplying circuit 116 supplies a standby electric power to a physical connecting circuit 112, a logical connecting circuit 113, and a standby control circuit 121.

Fig. 1

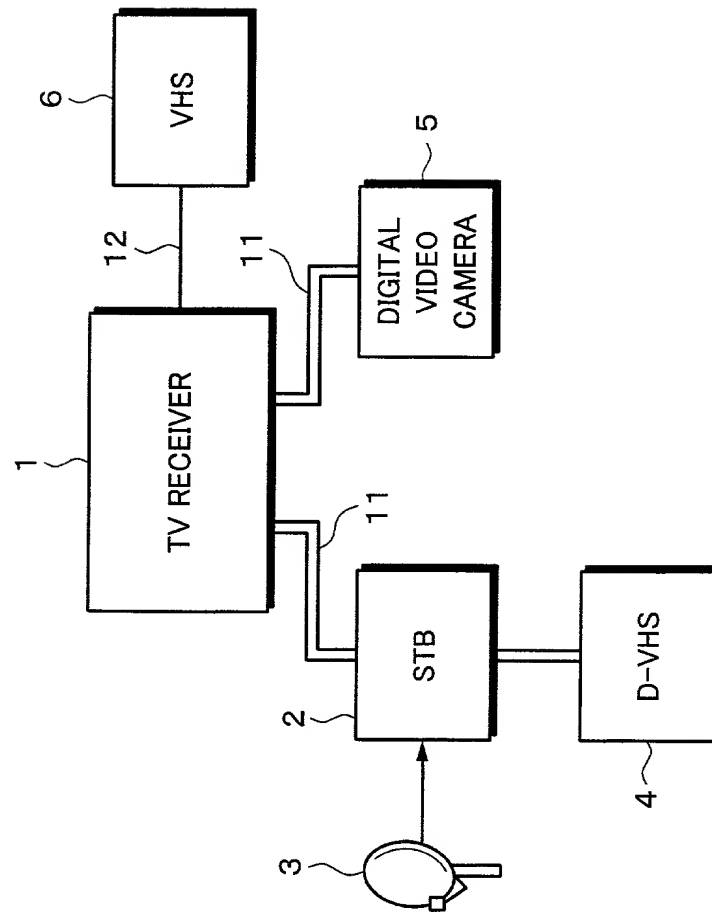
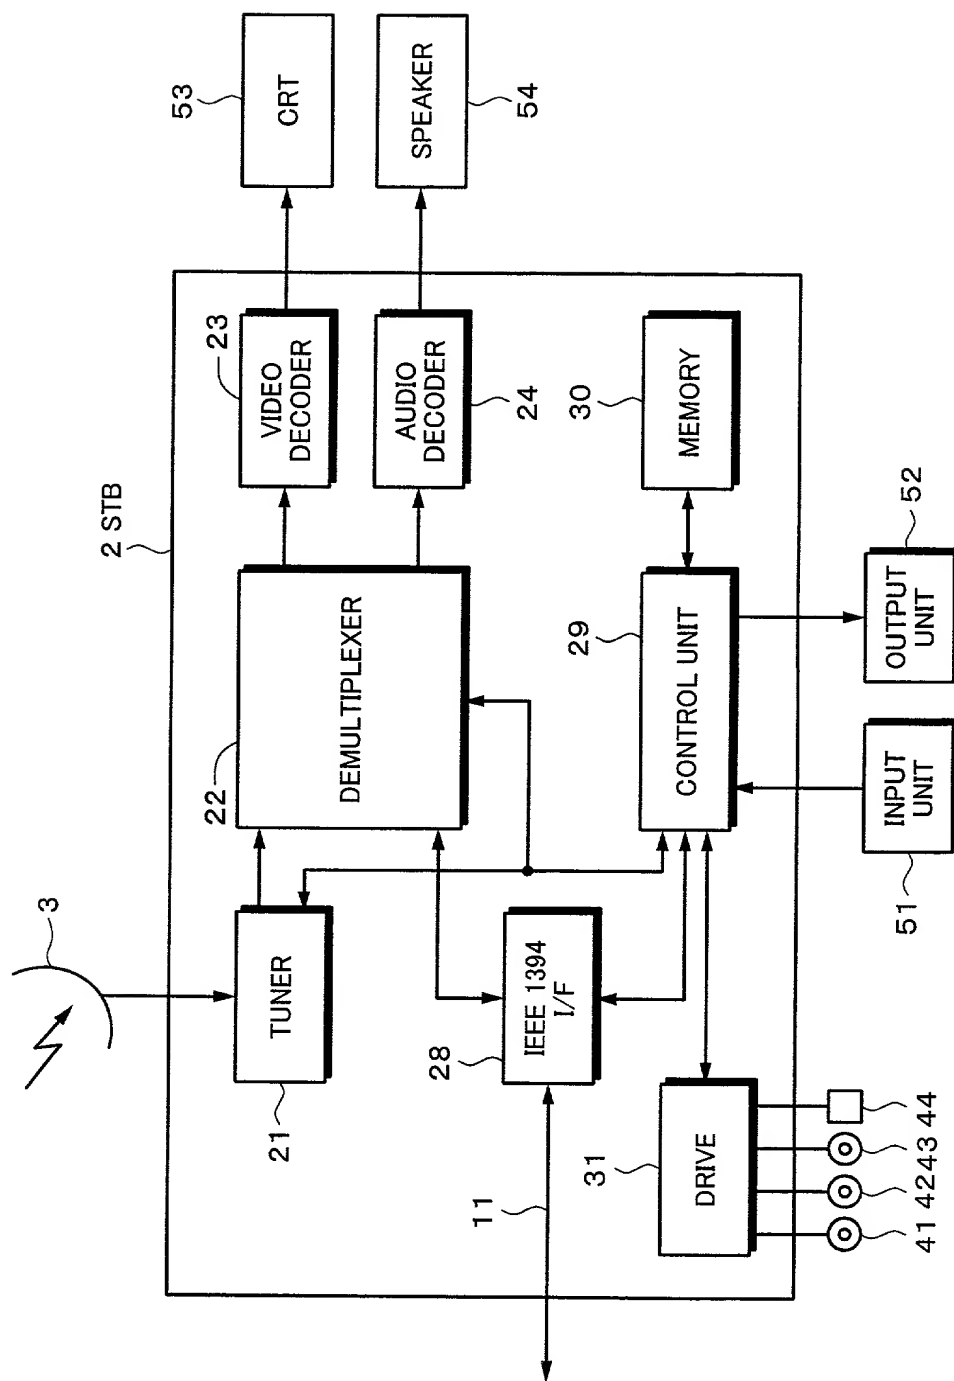


Fig. 2



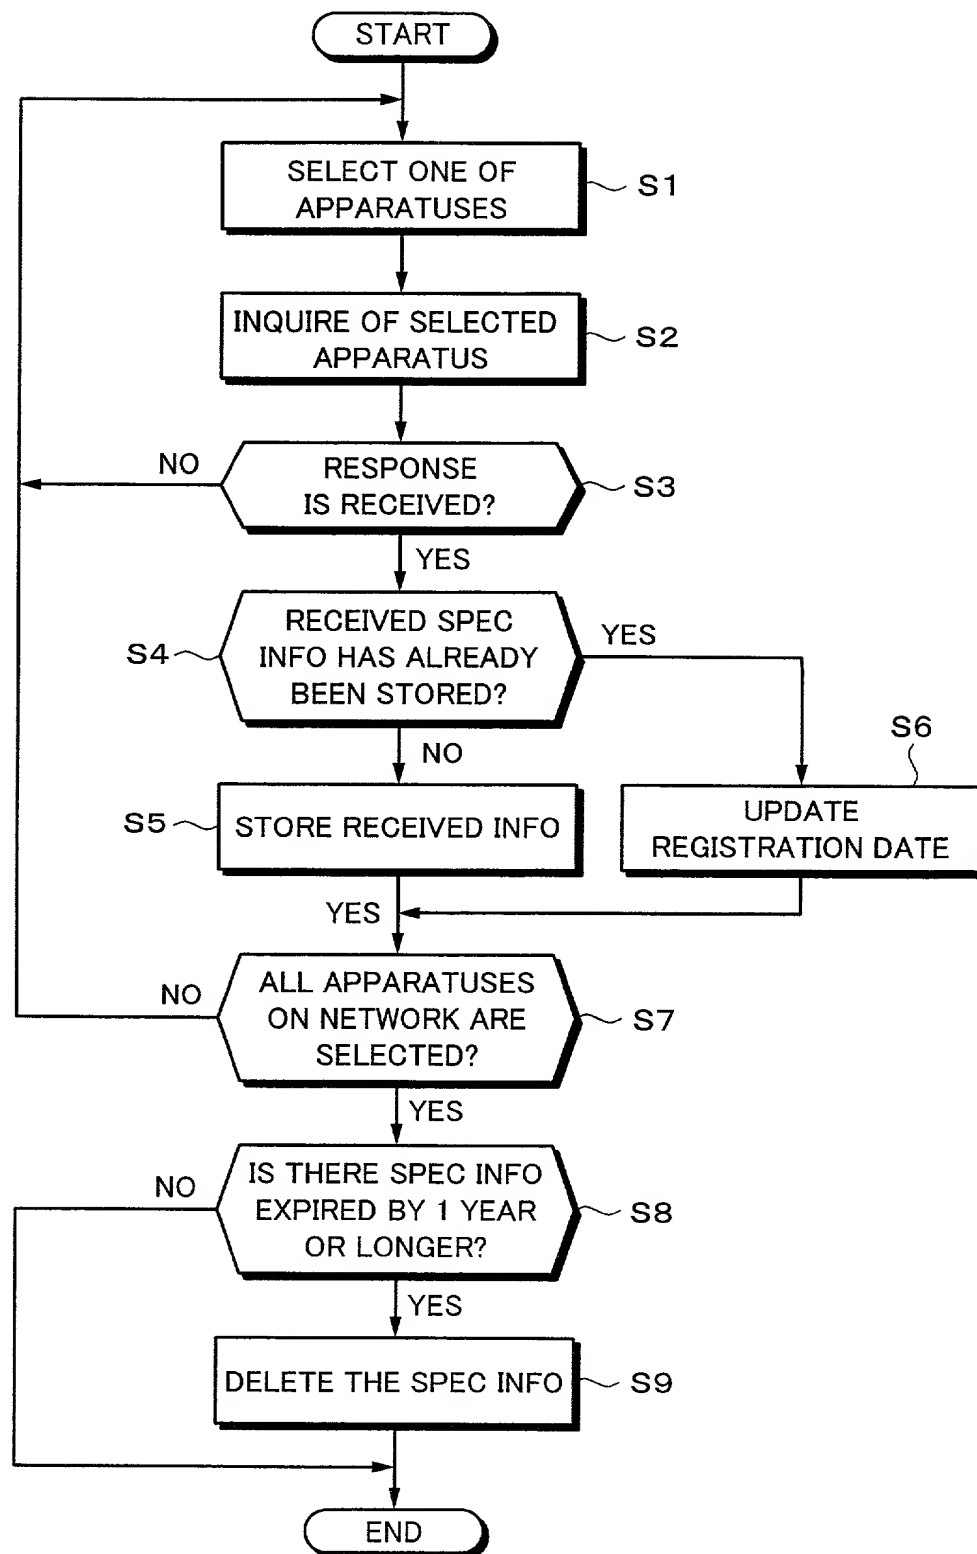
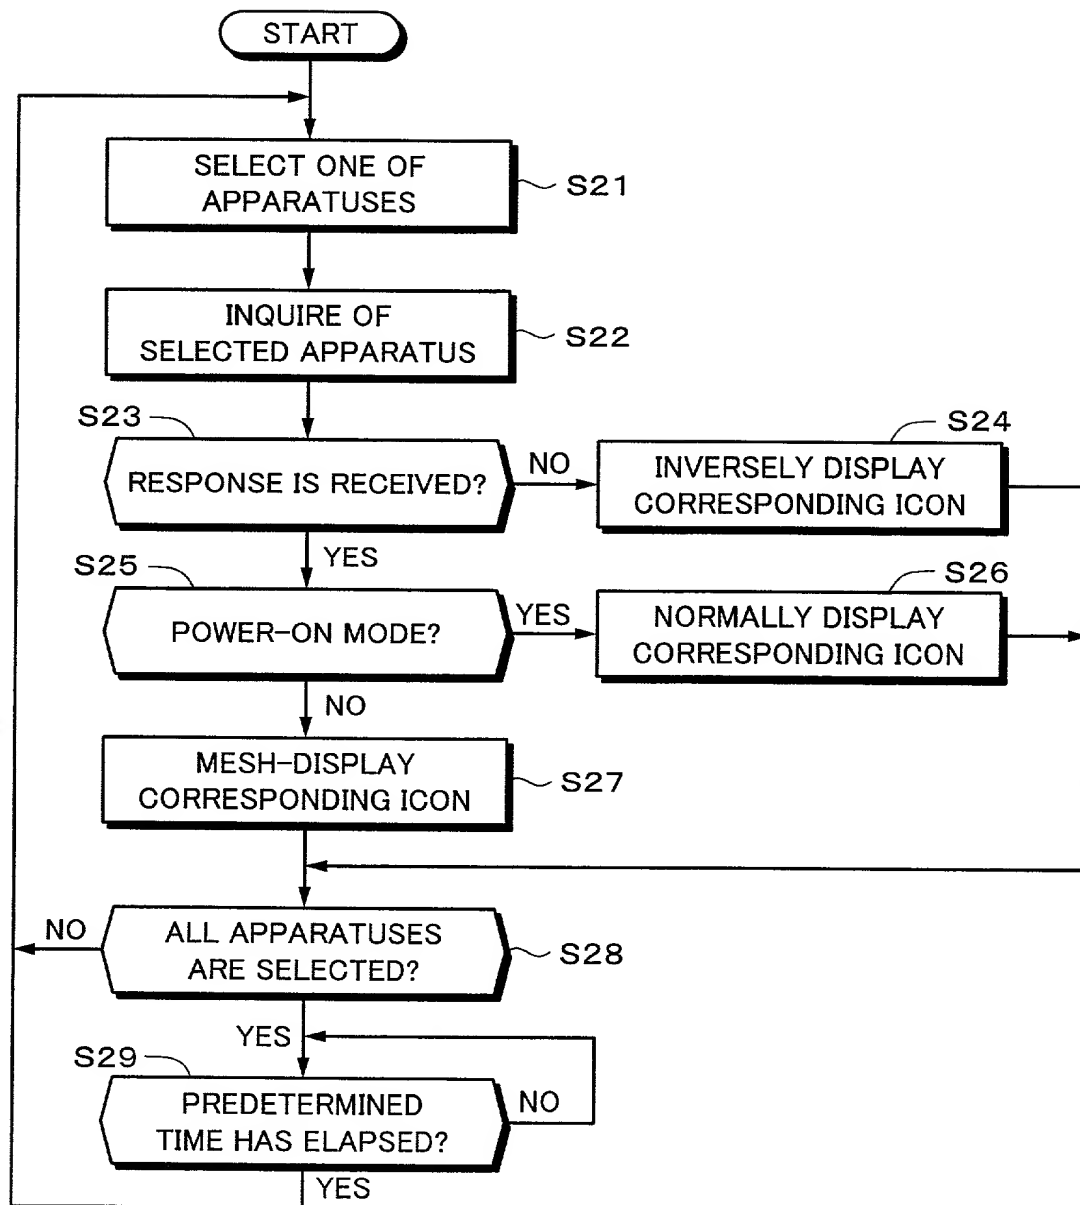
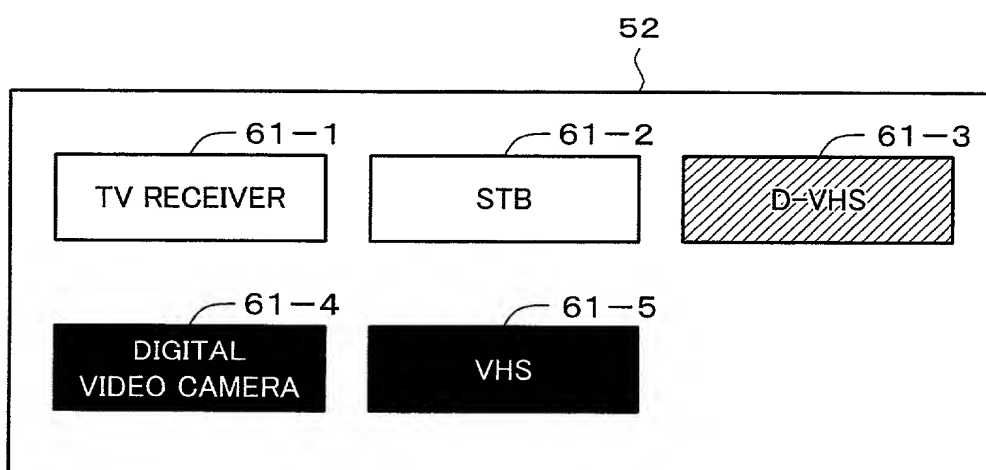
*Fig. 3*

Fig. 4



*Fig. 5**Fig. 6A**Fig. 6B*

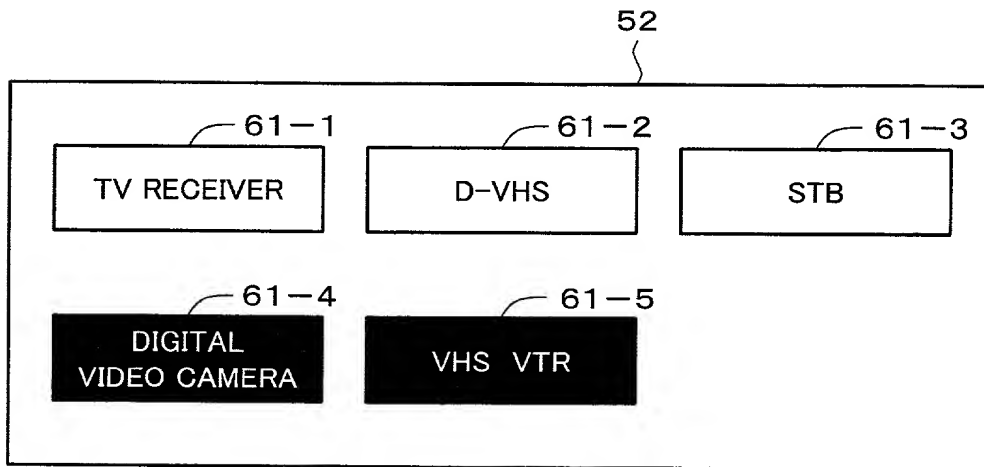
*Fig. 7*



Fig. 8

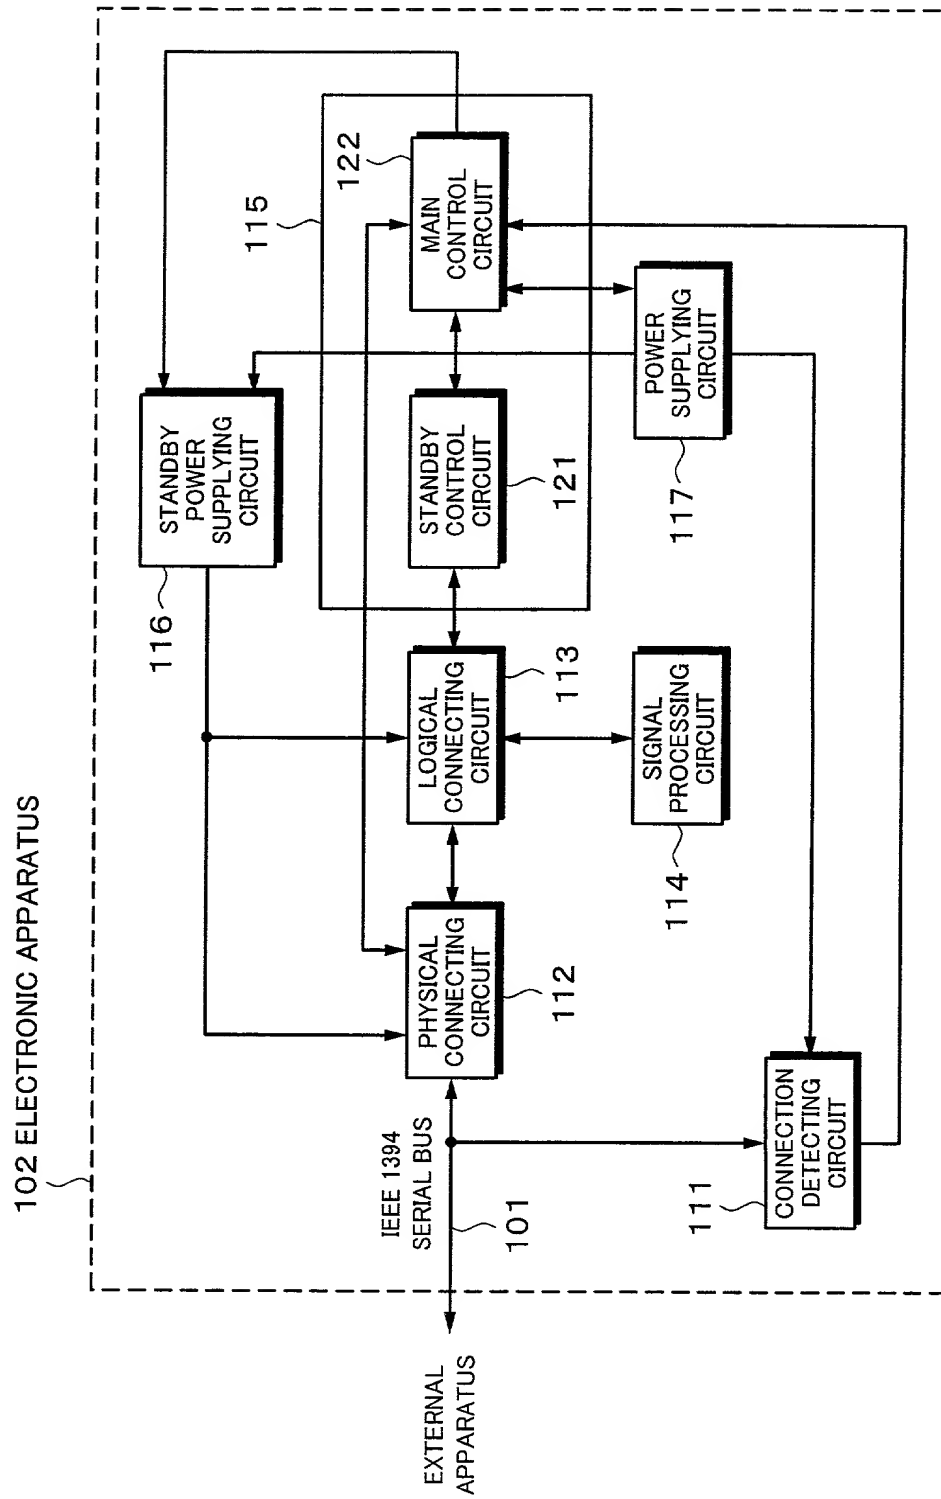


Fig. 9

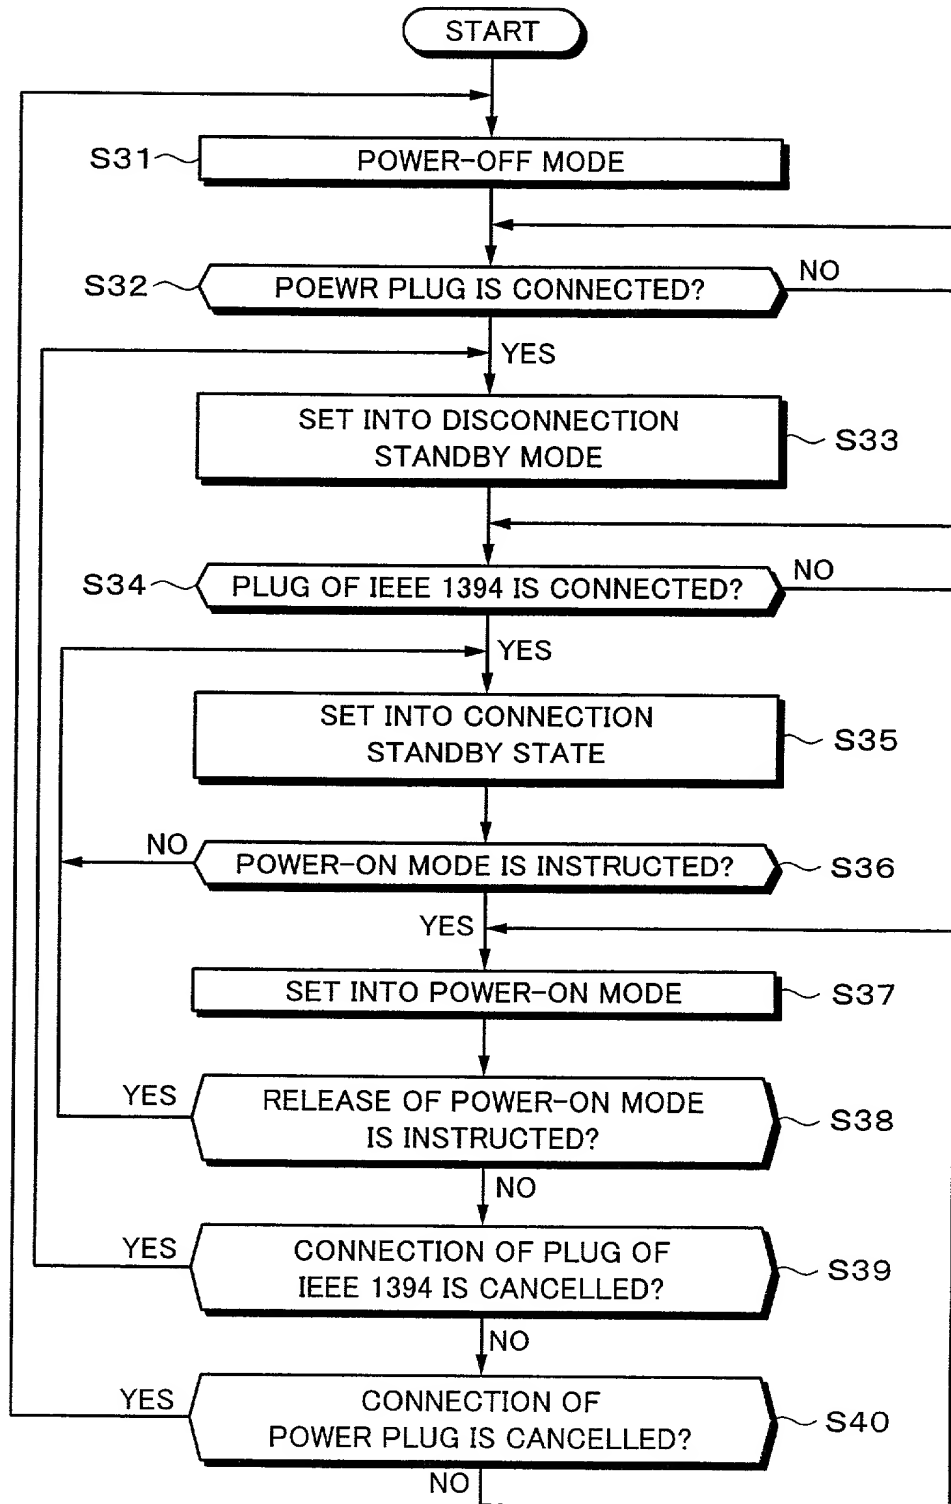


Fig. 10

	STANDBY (DISCONNECTION)	STANDBY (CONNECTION)	POWER ON	POWER OFF
PHYSICAL CONNECTING CIRCUIT	X	O	O	X
LOGICAL CONNECTING CIRCUIT	X	O	O	X
SIGNAL PROCESSING CIRCUIT	X	X	O	X
STANDBY CONTROL CIRCUIT	X	O	O	X
MAIN CONTROL CIRCUIT	O	O	O	X
STANDBY POWER SUPPLYING CIRCUIT	X	O	O	X
CONNECTION DETECTING CIRCUIT	O	O	O	X

## DESCRIPTION OF REFERENCE NUMERALS

- 1.. TV RECEIVER
- 2.. STB
- 5.. DIGITAL CAMERA
- 11.. IEEE1394 SERIAL BUS
- 28.. IEEE1394 INTERFACE
- 29.. CONTROL UNIT
- 51.. INPUT UNIT
- 52.. OUTPUT UNIT

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Declaration and Power of Attorney For Patent Application

### 特許出願宣言書及び委任状

### Japanese Language Declaration

### 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

INFORMATION PROCESSING APPARATUS,

DISPLAY CONTROL METHOD, AND

RECORDING MEDIUM

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を \_\_\_\_\_ とし、  
（該当する場合） \_\_\_\_\_ に訂正されました。

☒ was filed on September 21, 2000  
as United States Application Number or  
PCT International Application Number  
PCT/JP00/06467 and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

### Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

#### Prior Foreign Application(s)

外国での先行出願  
268046/1999

(Number)

(番号)

276101/1999

(Number)

(番号)

Japan

(Country)

(国名)

Japan

(Country)

(国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

#### Priority Not Claimed

優先権主張なし

22 September 1999

(Day/Month/Year Filed)

(出願年月日)

29 September 1999

(Day/Month/Year Filed)

(出願年月日)

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**Japanese Language Declaration**  
(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)  
Customer No. 000530

書類送付先

Send Correspondence to:

Customer No. 000530

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Robert B. Cohen, Reg. No. 32,768  
Telephone: 908-654-5000  
Facsimile: 908-654-7866

唯一または第一発明者名	Full name of sole or first inventor Jun HIRAI		
発明者の署名	日付	Inventor's signature	Date
		Jun HIRAI	June 7, 2001
住所	Residence Tokyo, Japan		
国籍	Citizenship Japan		
私書箱	Post Office Address c/o Sony Corporation, 7-35, Kitashinagawa 6-chome, Shinagawa-ku, Tokyo 141-0001, Japan		
第二共同発明者	Full name of second joint inventor, if any		
第二共同発明者	日付	Second inventor's signature	Date
住所	Residence		
国籍	Citizenship		
私書箱	Post Office Address		

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)